

THE DUOLINE SERIES

Power and Telecom Protector

Features

- Easy installation
- Failsafe protection
- Power indication
- Slimline, compact
- Lightweight



The Telecom-protector is a lightweight protection unit designed especially for Communication equipment. The unit is compact, and easy to install. The protector offers power and telecom protection for the connected equipment. The protection unit features a thermal disconnect device along with protection indication.

Specifications

Power Module


Nom. continuous voltage	230VAC 50Hz
Max. continuous current	16A
Max. discharge current ismax (8/20)	8kA, L-N, L-E, N-E
Residual voltage at ismax (8/20)	Approx. 900V
Response time	<25ns
Filtration	>60dB
Temperature range	-20°C to +70°C
Standards compliance	IEC 6164-1, ANSI C62.41

Data Module

Max. discharge current ismax (8/20)	10kA
Residual voltage ismax (8/20) Differential mode	<100V
Residual voltage ismax (8/20) Common mode	<100V
Response time	10ns
Data speed	115kBit/s
Connector	RJ11
No. of wires	2

* Without connectors

Dimensions

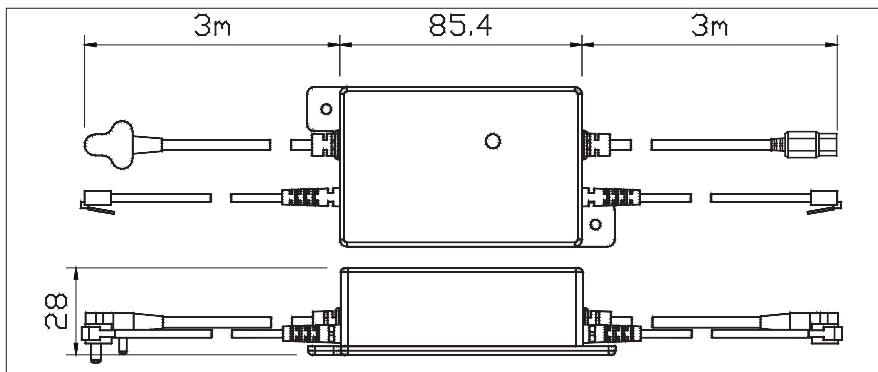

Designed and Manufactured by:

Clearline Protection Systems (Pty) Ltd

Roan Crescent Corporate Park North, Old Pta Road, Midrand, South Africa

P.O. Box 5985, Halfway House, 1685

Tel: +27 (0) 11 848-1100

Fax: +27 (0) 11 314-3880

E-mail: info@clearline.co.za

www.clearline.co.za

