

THE TELECOMLINE SERIES


12-00643

KP10 Hybrid

Features

- Easy installation
- Compact design
- High surge current capability
- Low residual voltage


The KP10 Hybrid uses new hybrid technology that implements the coarse and fine protection stages onto a single device resulting in faster response times and lower residual voltages than the traditional two stage method. This product is designed for LSA Plus termination blocks.

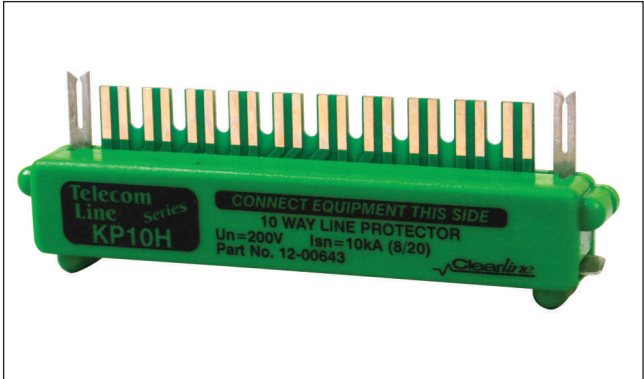


Specifications	
Number of pairs	10
Max. operating voltage	230VDC
Max. operating current	0.3A
Max. discharge current differential mode	5kA
Max. discharge current common mode	10kA
Residual voltage at 5kA differential mode	200V
Residual voltage at 5kA common mode	200V
Series resistance (per leg)	None
Temperature range	0°C to +70°C
Failsafe fitted	Yes
Data speed	0.1dB 2MHz

LSA Plus is a registered trademark of Krone GMBH Germany

Dimensions

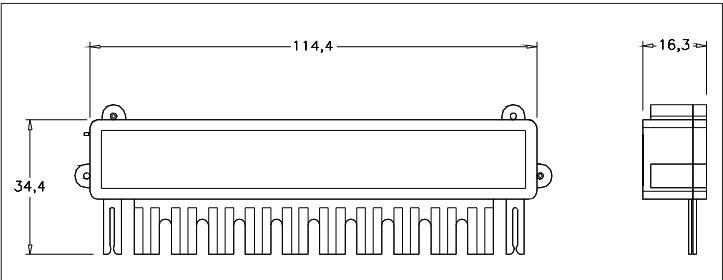

Circuit Diagram

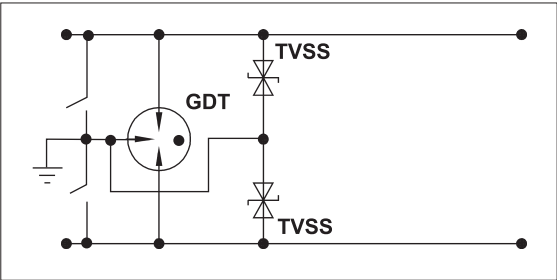

Designed and Manufactured by:
Clearline Protection Systems (Pty) Ltd
Roan Crescent Corporate Park North, Old Pta Road, Midrand, South Africa
P.O. Box 5985, Halfway House, 1685
Tel: +27 (0) 11 848-1111
Fax: +27 (0) 11 314-3880
E-mail: info@clearline.co.za
www.clearline.co.za

