


Rackstrip 2000

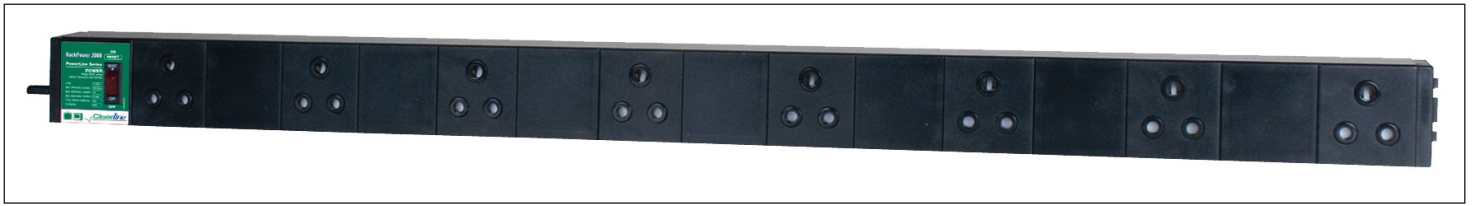

Features


- Compact design
- Surge protection and filtration
- Failsafe protection
- Various socket combinations

A power strip with surge protection for communication and modem racks. Utilizes a "2U" slot on a 483mm (19 inch) rack system and provides up to fifteen socket outlets to power equipment. The Rackstrip 2000 automatically disconnects the power to the equipment in case of damage to the protection element or power overload. An integral ON/OFF switch with circuit breaker and indicator has been provided. EMI/RFI filtration has also been provided. The Rackstrip 2000 is intended for side mounting.

Specifications

Max continuous voltage	250VAC 50Hz
Max continuous current	15A
Earth leakage current	<1.5mA
Max discharge current Ismax (8/20)	24kA
Filtration at 100 kHz	50dB
Response time	>25ns
Temperature range	10°C to +70°C
Standards compliance	IEC 99.4, IEC 950
Dimensions Rackpower 2000	490 x 60 x 65mm
Dimensions Rackstrip 2000	1000 x 40 x 65mm

Filter Response

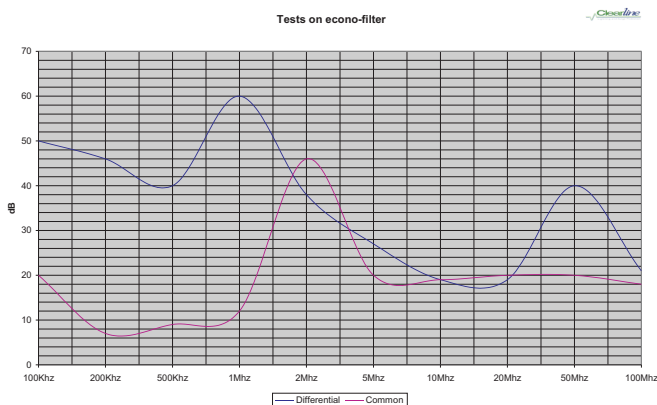

Designed and Manufactured by:

Clearline Protection Systems (Pty) Ltd

Roan Crescent Corporate Park North, Old Pta Road, Midrand, South Africa

P.O. Box 5985, Halfway House, 1685

Tel: +27 (0) 11 848-1111

Fax: +27 (0) 11 314-3880

E-mail: sales@clearline.co.za

www.clearline.co.za

